



A50-2.92M2.92F-L

Flexible Ultra Low Loss Coax Cable Assembly

A50/2.92mm Male /2.92mm Female/DC-26.5 GHz




Features:

- Max Frequency 26.5 GHz
- VSWR max of 1.30
- Velocity of Propagation of 83%

Applications:

- Test & Measurement equipment
- Manufacturing lab
- WAN system equipment

Cable Cross Section:

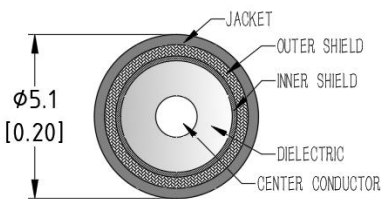

Electrical Characteristics:

| Parameter | Min | Typ | Max | Units |
|-----------------------------------------|-----|-------|------|-------|
| Frequency Range | DC | | 26.5 | GHz |
| VSWR | | 1.25 | 1.30 | :1 |
| Velocity of propagation | | 83% | | |
| Shielding Effectiveness | 90 | | | dB |
| Capacitance | | | 80 | pF/m |
| Phase Stability Vs. Flexure@26.5GHz | | ±3 | | ° |
| Amplitude Stability Vs. Flexure@26.5GHz | | ±0.03 | | dB |
| Phase Stability Vs. Temperature | | | 550 | PPM |

Environmental And Physical Characteristics:

| Description | Parameter | Units |
|-----------------------|-------------|-------|
| Cable Diameter | 5.1 | mm |
| Cable Jacket | FEP | |
| Min. Bending Radius | 26 | mm |
| Typical Flex life | 50000 | |
| Operating Temperature | -55 to +125 | °C |
| Storage Temperature | -55 to +165 | °C |

Cable Performance By Frequency

| Frequency | 2 GHz | 4 GHz | 6 GHz | 8 GHz | 10 GHz | 12 GHz | 16 GHz | 18 GHz | 26.5GHz |
|----------------------------|-------|-------|-------|-------|--------|--------|--------|--------|---------|
| Insertion Loss (dB/m Max) | 0.33 | 0.47 | 0.57 | 0.67 | 0.75 | 0.82 | 0.96 | 1.02 | 1.25 |
| RF Power CW (W Max.) | 615 | 431 | 350 | 302 | 268 | 244 | 210 | 197 | 161 |




A50-2.92M2.92F-L

Connectors:

| Description | Connector 1 | Connector 2 |
|------------------------------|-----------------------------|-----------------------------|
| Type | 2.92mm Straight Male | 2.92mm Straight Female |
| Contact Material And Plating | Beryllium Copper,Gold | Beryllium Copper,Gold |
| Dielectric Type | PEI | PEI |
| Body Material And Plating | Passivated Stainless Steel | Passivated Stainless Steel |
| Insertion Loss (dB Max) | $0.05 \cdot \sqrt{f_{GHz}}$ | $0.05 \cdot \sqrt{f_{GHz}}$ |

Outline Drawing:

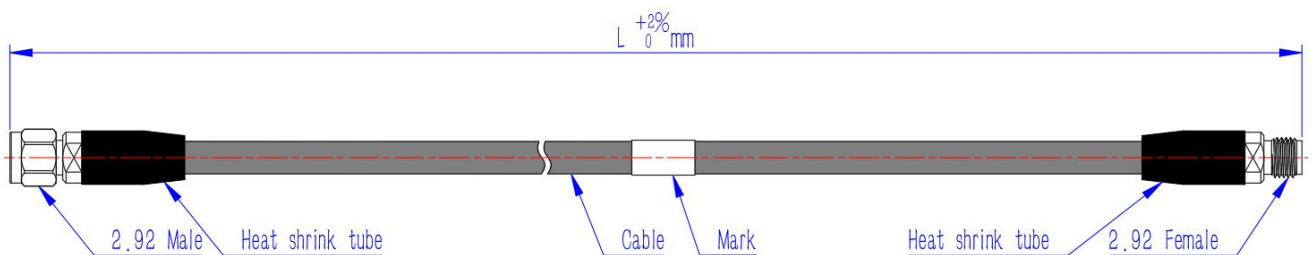

Ordering Information:

| Base Number | Length (Unit meters) | Armour | Phase/delay Matched |
|----------------|----------------------|---------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|
| A50-2.92M2.92F | -L | LEAVE BLANK(NOT REQUIRED) -A(默认黑色尼龙铠甲) -AS(不锈钢铠甲) -AP(PUR防水铠甲) -AT(透明铠甲) | LEAVE BLANK(NOT REQUIRED) -XXPS($\leq \pm XX$ PS) -XX°($\pm XX^\circ$) |

Typical Performance Data:

Model:A50-2.92M2.92F-1m

| Frequency | 2 GHz | | 6 GHz | | 8 GHz | | 12 GHz | | 18 GHz | | 26.5GHz | |
|---------------------|-------|------|-------|------|-------|------|--------|------|--------|------|---------|------|
| | Typ | Max | Typ | Max | Typ | Max | Typ | Max | Typ | Max | Typ | Max |
| Insertion Loss (dB) | 0.40 | 0.47 | 0.70 | 0.82 | 0.81 | 0.95 | 1.00 | 1.17 | 1.23 | 1.44 | 1.51 | 1.77 |
| VSWR | 1.05 | 1.1 | 1.08 | 1.15 | 1.1 | 1.15 | 1.15 | 1.2 | 1.2 | 1.3 | 1.25 | 1.3 |