



## Flexible Ultra Low Loss Coax Cable Assembly

PL67/1.85mm Male /1.85mm Female/DC-67 GHz


### Features:

- Max Frequency 67 GHz
- VSWR max of 1.30
- Velocity of Propagation of 76%

### Applications:

- Test & Measurement equipment
- Manufacturing lab
- WAN system equipment

### Cable Cross Section:

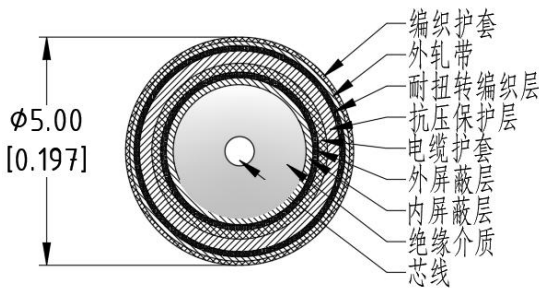

### Electrical Characteristics:

Parameter	Min	Typ	Max	Units
Frequency Range	DC		67	GHz
VSWR		1.20	1.30	:1
Velocity of propagation		76%		
Shielding Effectiveness	90			dB
Capacitance			87	pF/m
Phase Stability Vs. Flexure@67GHz		±5		°
Amplitude Stability Vs. Flexure@67GHz		±0.04		dB

### Environmental And Physical Characteristics:

Description	Parameter	Units
Cable Diameter	5.0	mm
Cable Jacket	PTFE	
Min. Bending Radius	38	mm
Typical Flex life	50000	
Operating Temperature	-55 to +150	°C
Storage Temperature	-55 to +165	°C

### Cable Performance By Frequency


Frequency	2 GHz	4 GHz	6 GHz	8 GHz	12 GHz	16 GHz	18 GHz	26.5 GHz	40GHz	50GHz	67GHz
Insertion Loss (dB/m Max)	1.00	1.43	1.76	2.05	2.53	2.95	3.14	3.87	4.84	5.48	6.45
RF Power CW (W Max.)	94	66	54	46	37	32	30	24	19	17	15



## Connectors:

Description	Connector 1	Connector 2
Type	1.85mm Straight Male	1.85mm Straight Female
Contact Material And Plating	Beryllium Copper,Gold	Beryllium Copper,Gold
Dielectric Type	PEI	PEI
Body Material And Plating	Passivated Stainless Steel	Passivated Stainless Steel
Insertion Loss (dB Max)	0.05* $\sqrt{f_{GHz}}$	0.05* $\sqrt{f_{GHz}}$

## Outline Drawing:

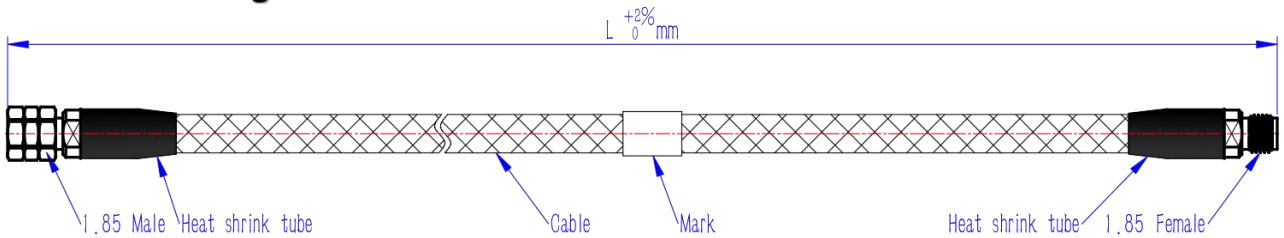

## Ordering Information:

Base Number	Length (Unit meters)	Armour	Phase/delay Matched
PL67-1.85M1.85F	-L	<b>LEAVE BLANK(NOT REQUIRED)</b> -A(默认黑色尼龙铠甲) -AS(不锈钢铠甲) -AP(PUR防水铠甲) -AT(透明铠甲)	<b>LEAVE BLANK(NOT REQUIRED)</b> -XXPS( $\leq \pm XX$ PS) -XX°( $\pm XX^\circ$ )

## Typical Performance Data:

Model:PL67-1.85M1.85F-1m

Frequency	2 GHz		8 GHz		12 GHz		18 GHz		26.5GHz		40GHz		50GHz		67GHz	
	Typ	Max	Typ	Max	Typ	Max	Typ	Max	Typ	Max	Typ	Max	Typ	Max	Typ	Max
Insertion Loss	1.07	1.14	2.19	2.33	2.70	2.88	3.35	3.57	4.13	4.38	5.16	5.48	5.83	6.19	6.86	7.27
VSWR	1.02	1.05	1.03	1.05	1.05	1.10	1.10	1.15	1.10	1.15	1.15	1.20	1.20	1.25	1.20	1.25

