

# F6 系列 3GHz 军标电缆组件




## Product Specification

Product Mode

F6-NMNM-L

Sketch Map:

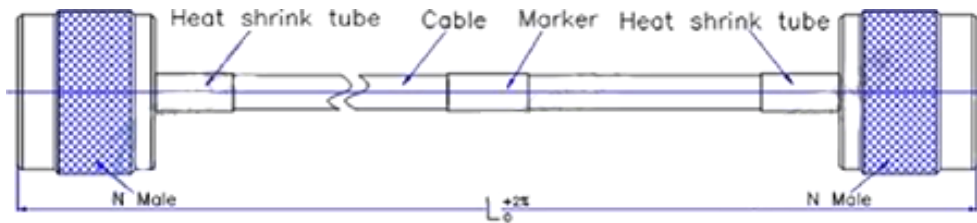

## Electrical & Mechanical Characteristics

Impedance(Ohm)	50
Operating Frequency(GHz)	3.0
Dielectric Withstanding Voltage(V)	500
VSWR	1.35:1@3GHz
Shielding Effectiveness(dB)	60
Velocity Of Propagation (%)	70
Min. Bending Radius Static (mm)	13
Operating Temperature(°C)	-55~+125
Cable Diameter (mm)	2.5

Part Number	Max Insertion Loss ≤ (dB)			
	0.1GHz	0.4GHz	1.0GHz	3.0GHz
F6-NMNM-0.5M	0.16	0.30	0.49	0.87
F6-NMNM-1.0M	0.29	0.57	0.92	1.64
F6-NMNM-2.0M	0.55	1.10	1.78	3.17
<b>Power CW for Cable (Watts)</b>	340	170	110	60

**part number coding for different connector and different length**

